



201


DELAYED CONDUCTIVITY LEVEL SWITCH

TECHNICAL CHARACTERISTICS




- **Electric wiring:** plug-in type; octal socket
- **Protection class:** IP40
- **Internal components:** surface mounting technology (SMD)
- **Front led lamps:** green: power supply
red: switch status
- **Sensitivity:** standard 10 μ S - 10.000 μ S
on request 1 μ S - 20 μ S
- **Dealy:** to ON or to OFF; from 0,5" to 12"
- **Electrolysis phenomena:** absent in a.c. models
- **Contact:** N.O. - 5 A - 230V a.c.
- **Power supply:** 24 or 110 or 230 V a.c.
- **Frequency:** 50 - 60 Hz
- **Absorption:** 5 VA
- **Weight:** 220 g

MECHANICAL DIMENSIONS

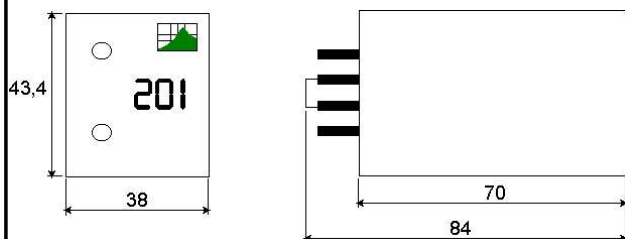

WIRING DIAGRAM

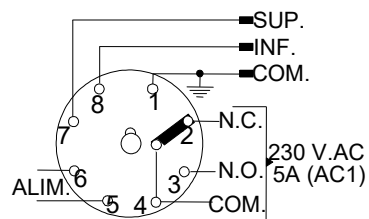

MAIN APPLICATIONS

- boilers
- tanks, wells
- heating plants
- pumping system
- protection of pumps, disabling running without water

ORDER CODES

CODE	INTEGRAL RESISTIVITY	INTEGRAL SENSITIVITY	CHARACTERISTICS	POWER SUPPLY
201-000-0x	0-100 k Ω	10-10.000 μ S	delay to on	x=1 24Vac; x=3 230Vac
201-100-0x	0-100 k Ω	10-10.000 μ S	delay to off	x=1 24Vac; x=3 230Vac
201-102-01	50 k -1 M Ω	1 - 20 μ S	delay to on - high sensibility	x=1 24Vac